


Connector for
The 3 Phase
not part of ouer
delivery.




Fan 230Vac

U2 Power out

L1 Line inn

H=250 mm.

OPT770Z

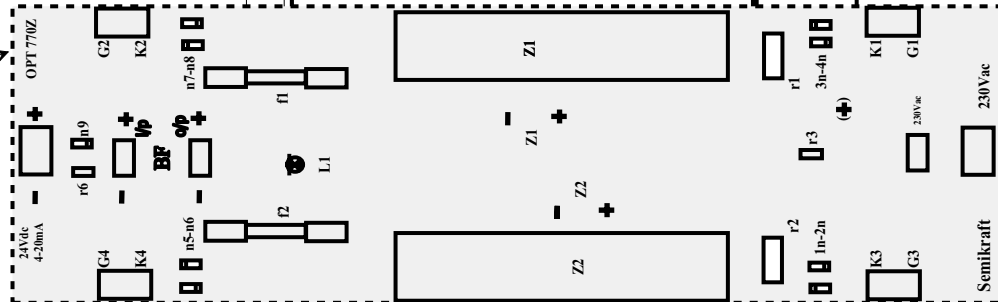

L3 Line inn

Label view

M6

W4 Power out

W =275 mm

230Vac

Signal i/p
Option
4-20mA,
0-10Vdc,
24Vdc without BF

Depth
215 mm

P3/200F

0,1 °C v/220W,385W
0,095°C v/500W

Label view

BF

Semikraft

140mm

Wire instruction for CE
completnes see Wire-
diagram W13-96020Z

Correction;

Weight kg	Total Loss Watt
ca 6 kg	220W/110A 385W/160A 450W/200A

Målskisse/Outline

W₂C 700.V₂₀₀AF+OPT+BF

SOLID STATE POWER

700V 110A- 160A- 200A AMP

TEGN.

H.W:

TILBUDS NR.

ORDRE NR.

Varenr.; 14-263

W13Z70-200

SEMİKRAFT DRÖBAK